

Collapsing inline elements



The screenshot shows a code editor window titled "Edit source". The code in the editor is:

```
1 <p>
2   <span class="span-0"><span class="span-1">Nested</span></span>
3 </p>
```

The "span class="span-1"" is highlighted in green. At the bottom right of the editor are "Cancel" and "Save" buttons.

becomes




The screenshot shows a code editor window titled "Edit source". The code in the editor is:

```
1 <p>
2   <span class="span-0 span-1">Nested</span>
3 </p>
```

The "span class="span-1"" is now shown as a single span element with both classes applied. At the bottom right of the editor are "Cancel" and "Save" buttons.

Changes nesting

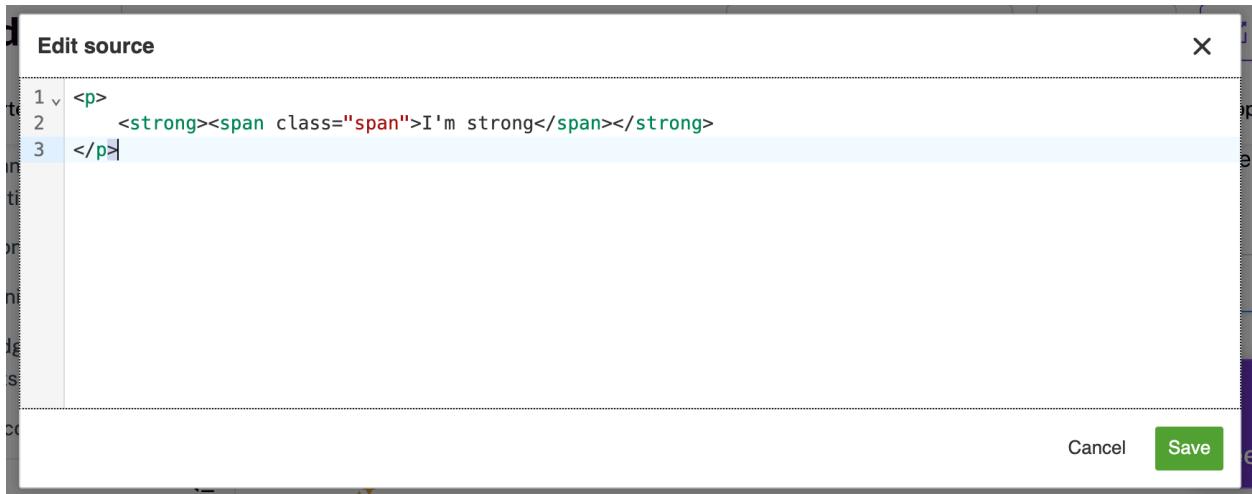

1 v <p>
2 I'm strong
3 </p>

Cancel Save

becomes



1 v <p>
2 I'm strong
3 </p>

Cancel Save

Edit source X

```
1 <p>
2   <tt><span>foo</span></tt>
3 </p>
```

Cancel Save

becomes


Edit source X

```
1 <p>
2   <span><tt>foo</tt></span>
3 </p>
```

Cancel Save

Merging inline sibling elements

(we hacked our way around that)

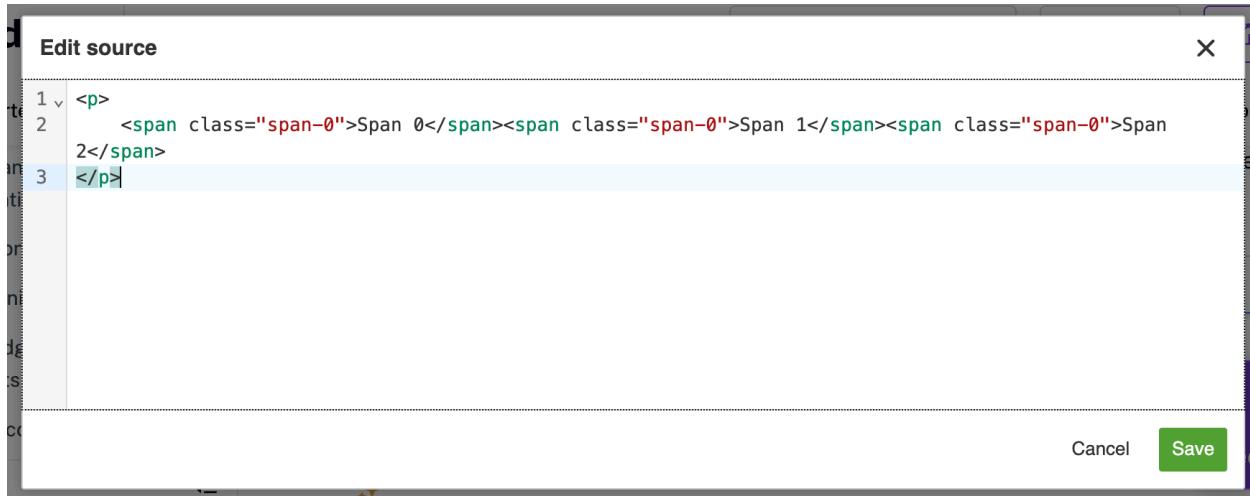


The screenshot shows a code editor window titled "Edit source". The code in the editor is:

```
1 <p>
2   <span class="span-0">Span 0</span><span class="span-0">Span 1</span><span class="span-0">Span
3   2</span>
4 </p>
```

The code consists of a `<p>` tag containing three `` tags with the class `span-0`. The third `` tag contains the text `2`. The code editor has a "Save" button in the bottom right corner.

becomes

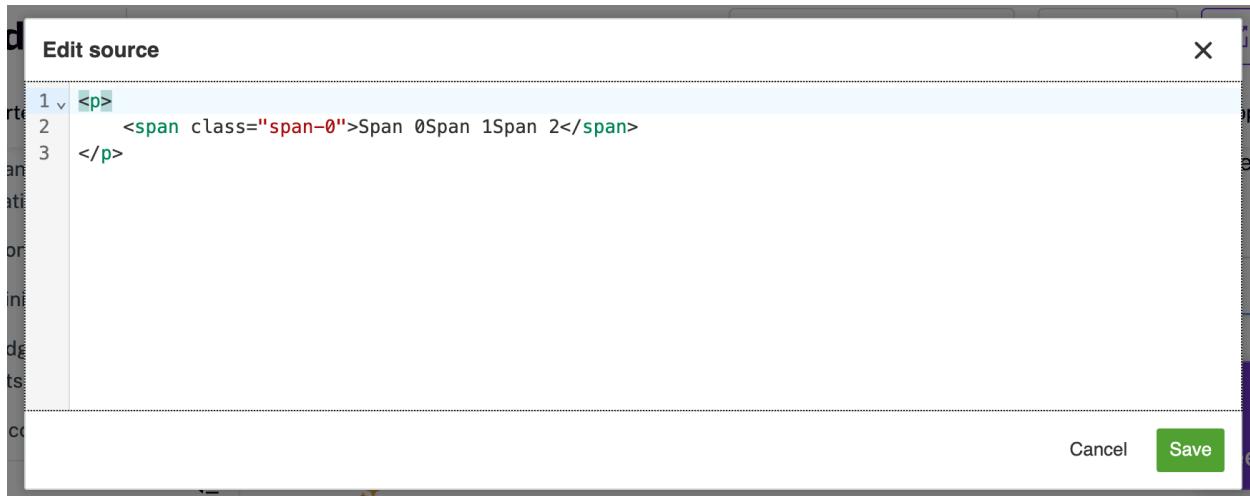

The screenshot shows a code editor window titled "Edit source". The code in the editor is:

```
1 <p>
2   <span class="span-0">Span 0Span 1Span 2</span>
3 </p>
```

The code has been modified to merge the three `` tags into a single `` tag with the class `span-0`, containing the text `Span 0Span 1Span 2`. The code editor has a "Save" button in the bottom right corner.

Splitting inline elements



The screenshot shows a code editor window titled "Edit source". The code in the editor is:

```
1 v <p>
2   <span class="parent">Before <span class="child">middle</span> after</span>
3 </p>
```

At the bottom right of the editor are two buttons: "Cancel" and "Save".

becomes



The screenshot shows a code editor window titled "Edit source". The code in the editor is:

```
1 v <p>
2   <span class="parent">Before </span><span class="parent child">middle</span><span class="parent">
3 after</span>
</p>
```

At the bottom right of the editor are two buttons: "Cancel" and "Save".